
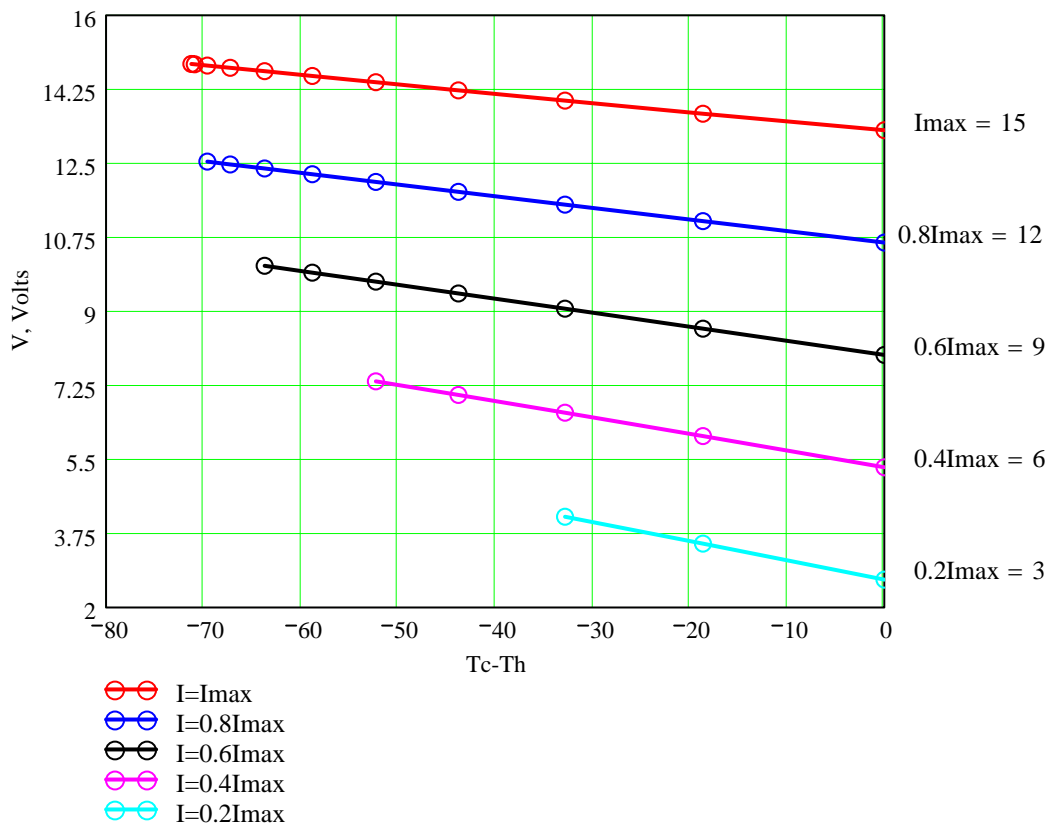


Performance graphs for TM-127-1.6-15.0 modules at Th=25 °C

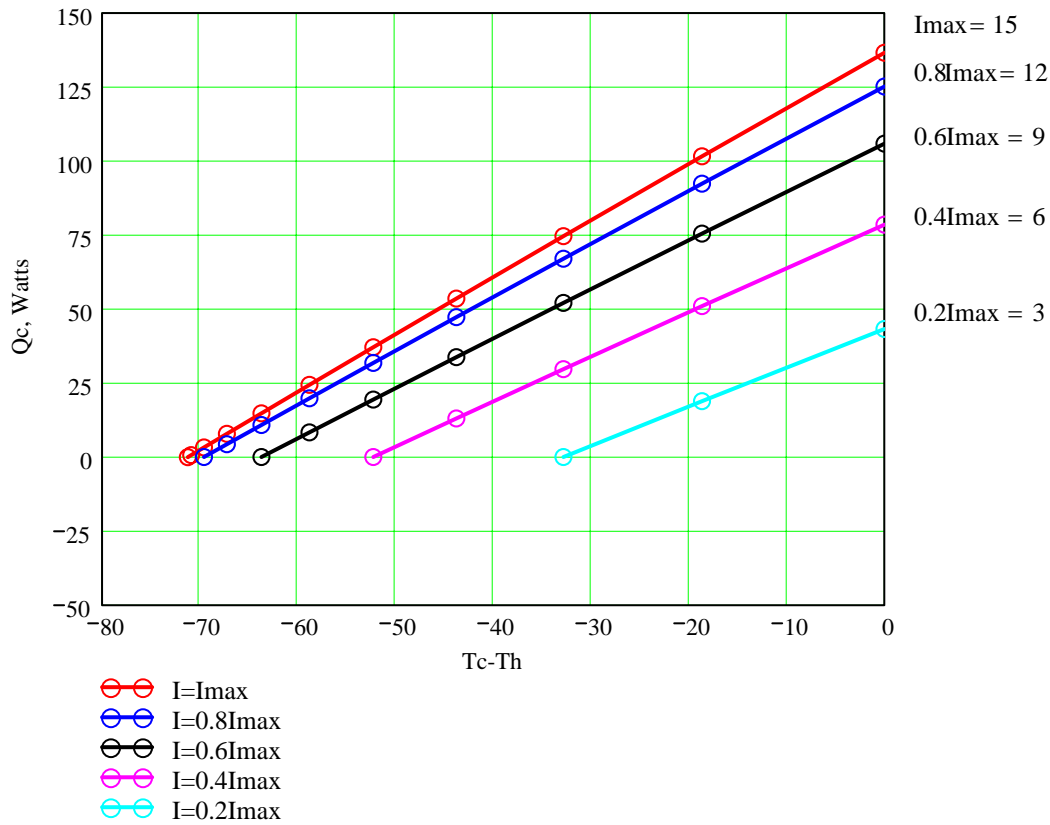

Q_c -refrigerating capacity at cold side of the module (Watts),

$\Delta T = T_c - T_h$ - temperature difference between cold and hot sides of the module (°C),

I - DC current through the module (Amps)

V -voltage applied to the module (Volts).