
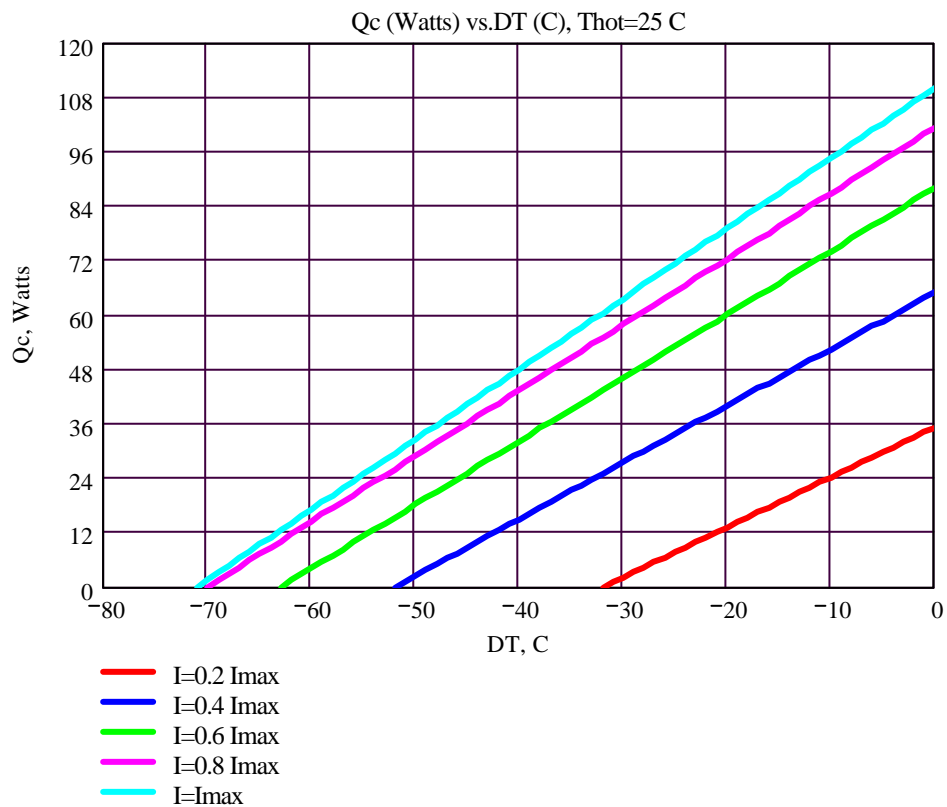


Performance graphs for TM-127-2.0-15.0 modules at  $T_{hot}=25\text{ }^{\circ}\text{C}$

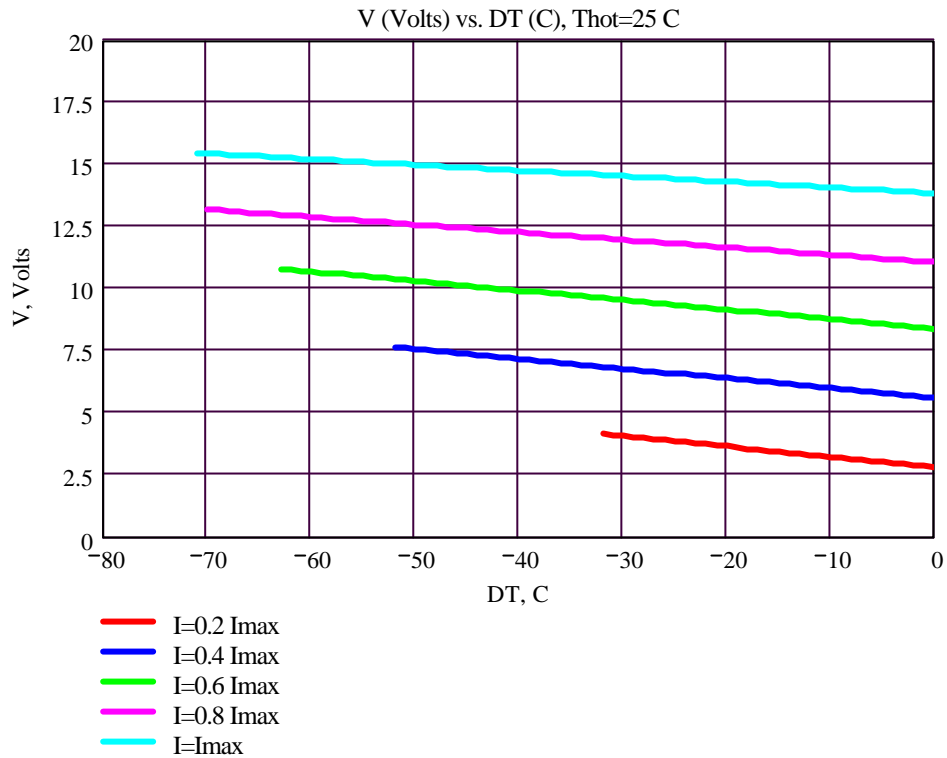

0.2 · I<sub>max</sub> = 3      0.4 · I<sub>max</sub> = 6      0.6 · I<sub>max</sub> = 9      0.8 · I<sub>max</sub> = 12      I<sub>max</sub> = 15

DT = T<sub>cold</sub> - T<sub>hot</sub> - temperature difference between cold and hot faces of TE module  
 Q<sub>c</sub> - refrigerating capacity at cold face  
 V - input DC voltage  
 I - input current