
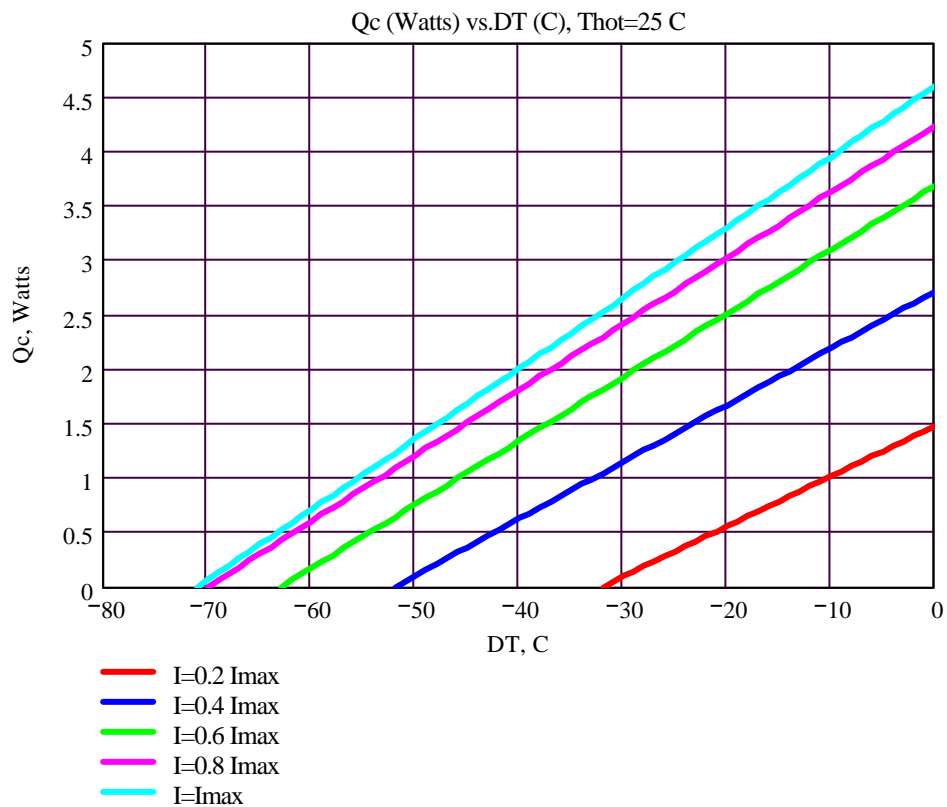


Performance graphs for TM-17-1.0-3.9 modules at $T_{hot}=25\text{ }^{\circ}\text{C}$

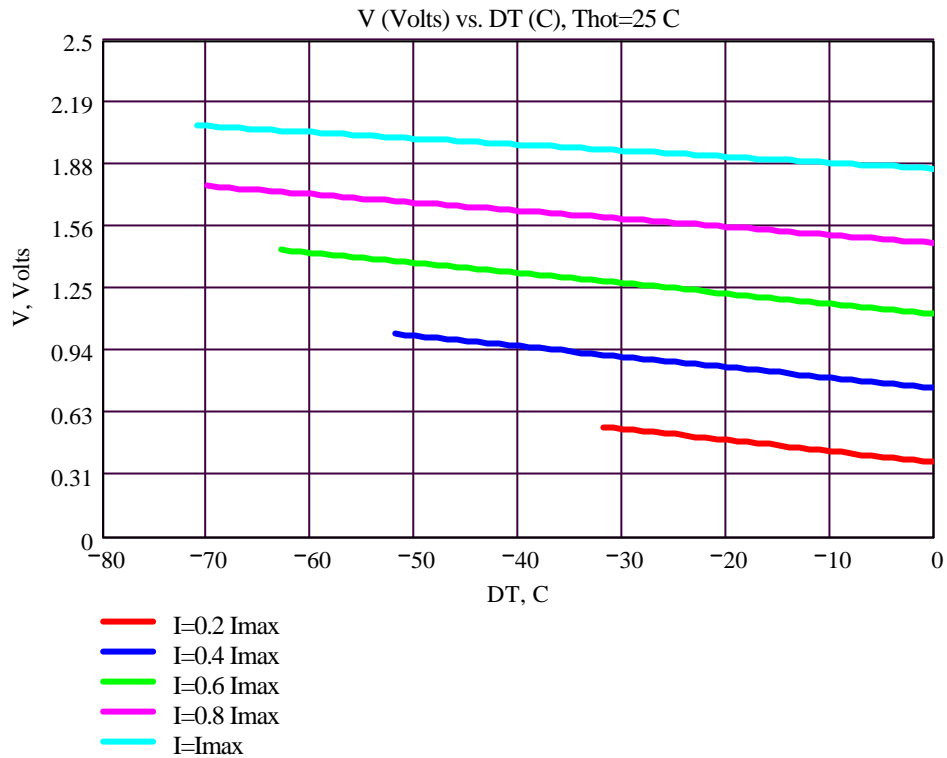

$0.2 \cdot I_{max} = 0.78$ $0.4 \cdot I_{max} = 1.56$ $0.6 \cdot I_{max} = 2.34$ $0.8 \cdot I_{max} = 3.12$ $I_{max} = 3.9$

DT = $T_{cold} - T_{hot}$ - temperature difference between cold and hot faces of TE module

Q_c - refrigerating capacity at cold face

V - input DC voltage

I - input current