
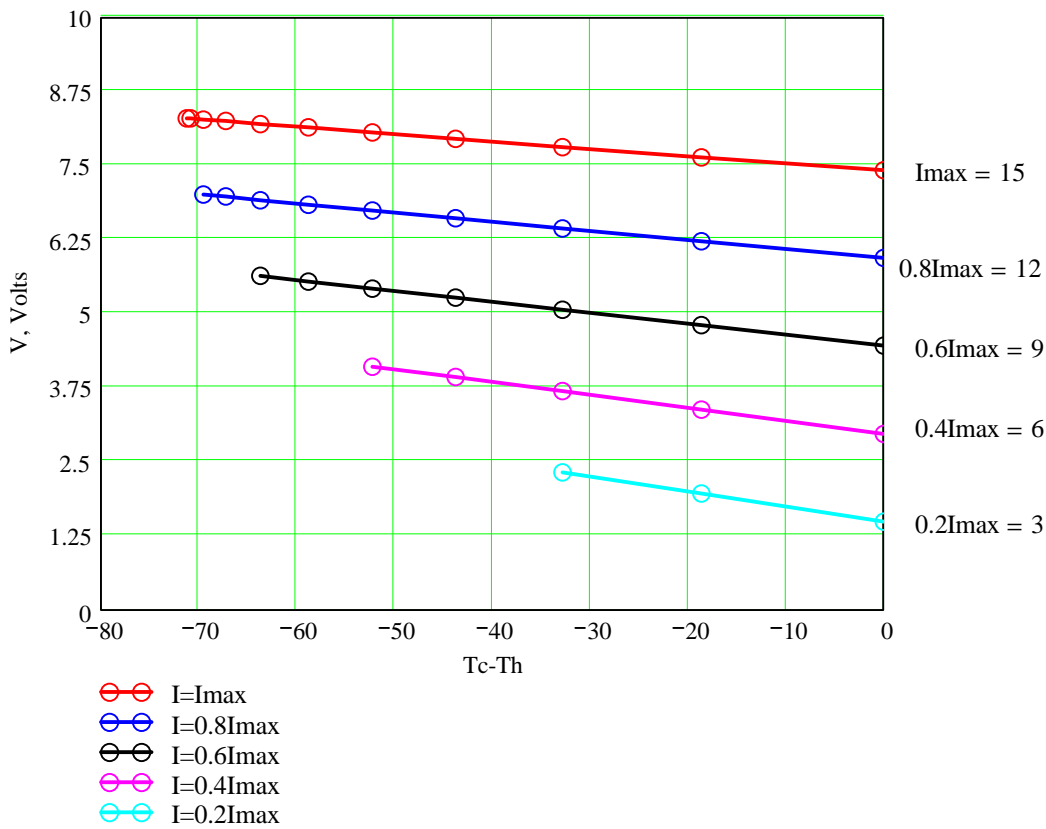


Performance graphs for TM-71-1.6-15.0 modules at $T_h=25\text{ }^\circ\text{C}$

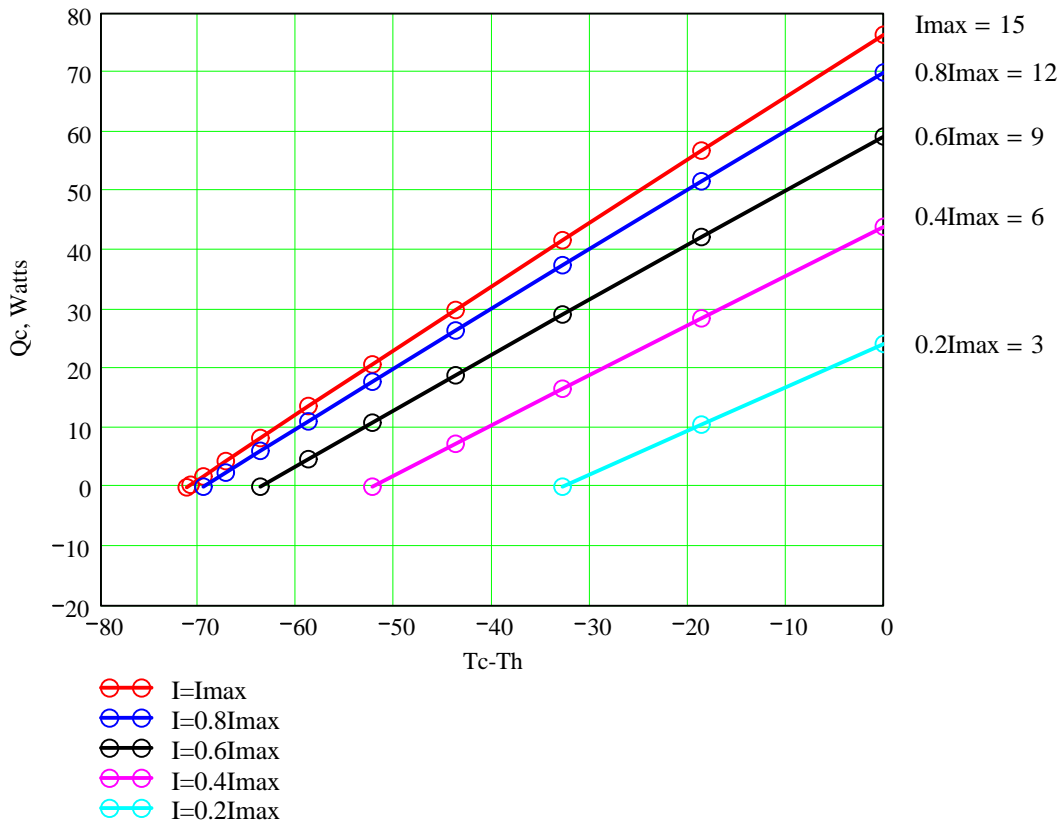

Q_c -refrigerating capacity at cold side of the module (Watts),

$\Delta T = T_c - T_h$ - temperature difference between cold and hot sides of the module (°C),

I - DC current through the modules (Amps)

V -voltage applied to the module (Volts).