
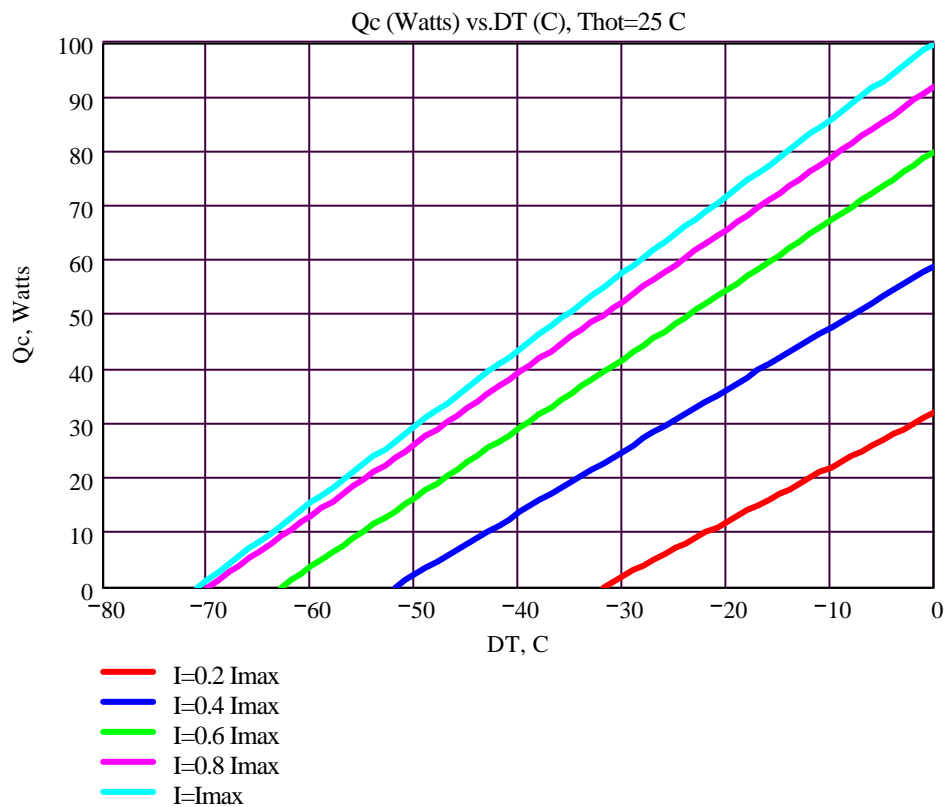


Performance graphs for TM-75-2.5-20.0 modules at $T_{hot}=25\text{ }^{\circ}\text{C}$

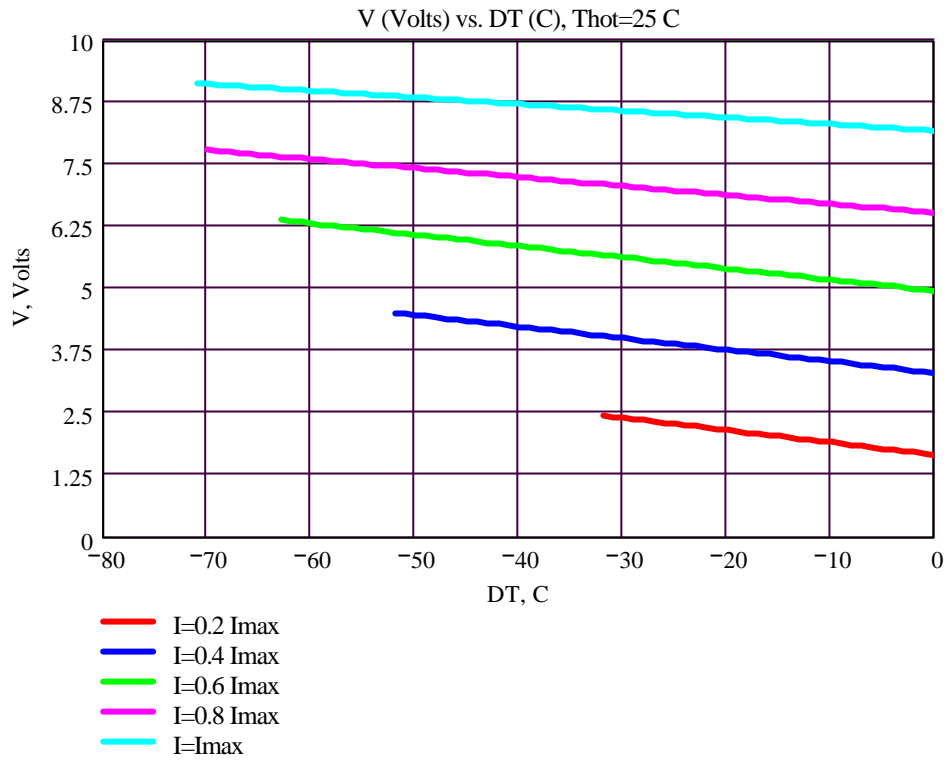

$0.2 \cdot I_{max} = 4$ $0.4 \cdot I_{max} = 8$ $0.6 \cdot I_{max} = 12$ $0.8 \cdot I_{max} = 16$ $I_{max} = 20$

DT = $T_{cold} - T_{hot}$ - temperature difference between cold and hot faces of TE module
 Q_c - refrigerating capacity at cold face
 V - input DC voltage
 I - input current