

Thermoelectric module TM - 32-2.0-9.0



Performance Data


I _{max} (amps)	9.9	ΔT=ΔT _{max} . Th=25 ± 0.5 °C.
V _{max} (volts)	3.8	Th=25 ± 0.5 °C. ΔT=ΔT _{max} . I=I _{max} ± 0.1A
ΔT _{max} (°C)	71	Th=25 ± 0.5 °C. I=I _{max} ± 0.1A
Q _{max} (watts)	21.4	Th=T _c =25 ± 0.5 °C. I=I _{max} ± 0.1A
AC resistance (ohms)	0.3	25 ± 0.5 °C.

Environment: dry air, N₂

Tolerances for thermal and electrical parameters ± 10%

Drawing № ND 065.00.00


Dimensions in millimeters

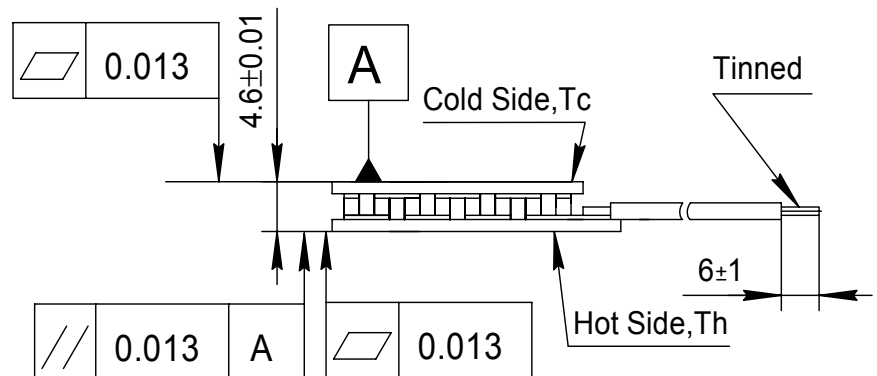

Options

Model Number	Description
TM-32-2.0-9.0 M	High reliable version on Cold Side

Lead wire insulation	Module maximum processing temperature
PVC	90°C
Silicone	200°C
PTFE	200°C

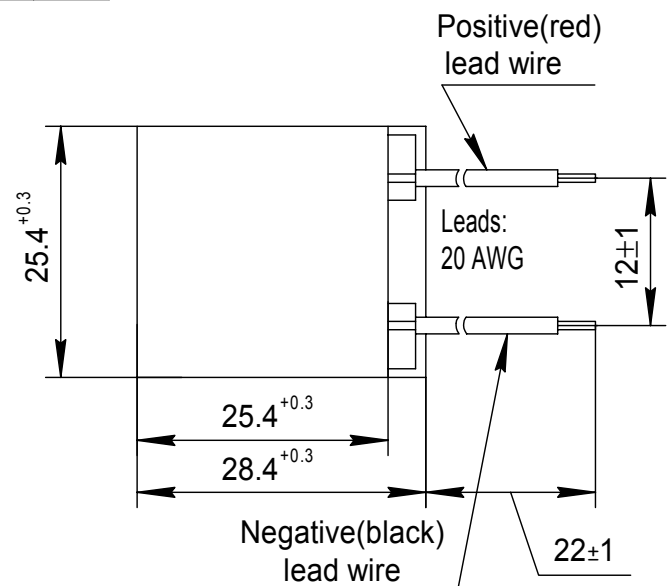

Additional



- RoHS 2002/95/EC compliant
- Cold Side and Hot Side Ceramics: Al₂O₃, white 96%
- Assembling Solder: SnSb, M.P. 232 °C ; SnCu M.P. 227 °C

SCTB NORD, 3, Peschany Carrier, 109383 Moscow, Russia;

Tel +7(495)-357-67-71; FAX +7(495)-348-07-00;



<http://www.sctbnord.com>; e-mail info@sctbnord.com

Performance graphs for TM-32-2.0-9.0 modules at $T_h=25\text{ }^\circ\text{C}$
 Environment: dry air, N_2

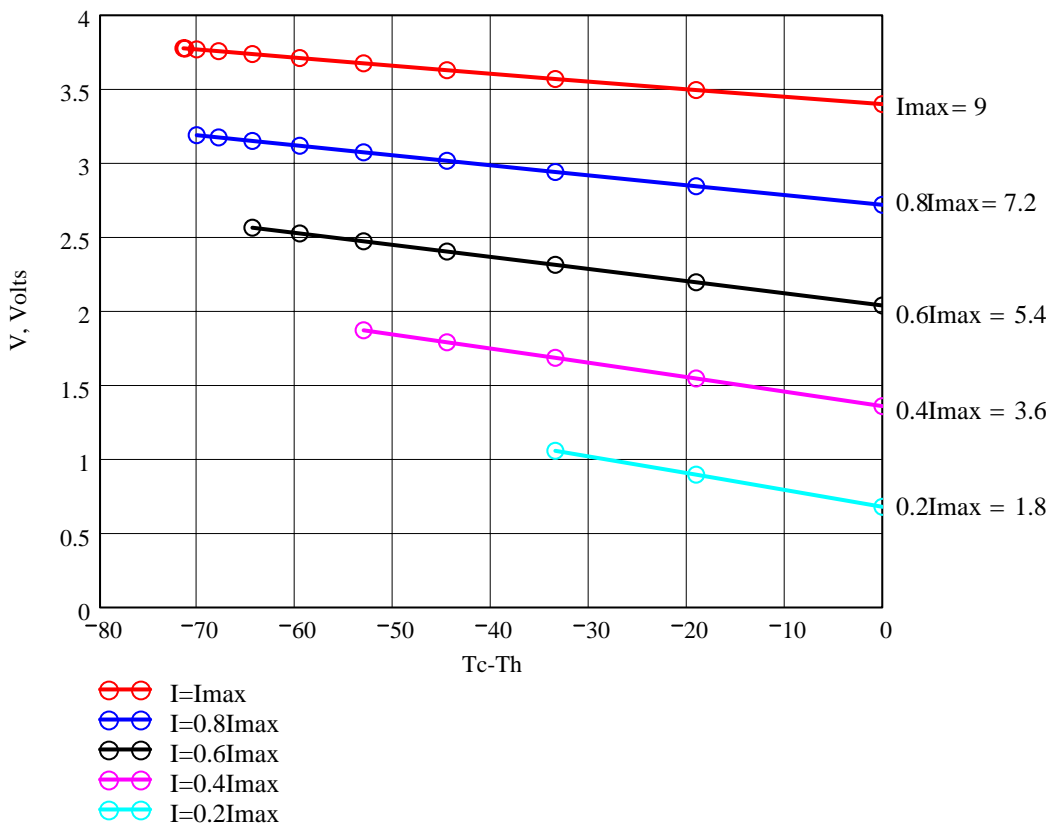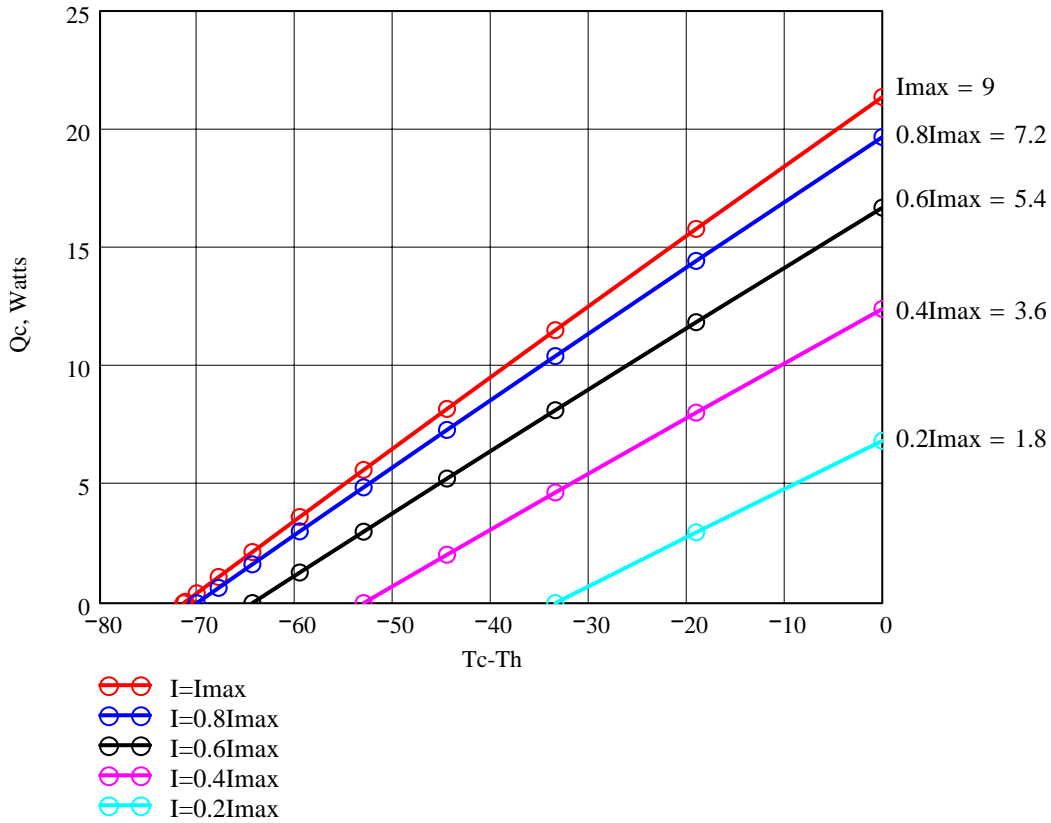

Q_c - refrigerating capacity at cold side of the module (Watts),
 $\Delta T = T_c - T_h$ - temperature difference between cold and hot sides of the module (°C),
 I - DC current through the modules (Amps)
 V - voltage applied to the module (Volts).

Performance graphs for TM-32-2.0-9.0 modules at $T_h=50\text{ }^\circ\text{C}$
 Environment: dry air, N_2

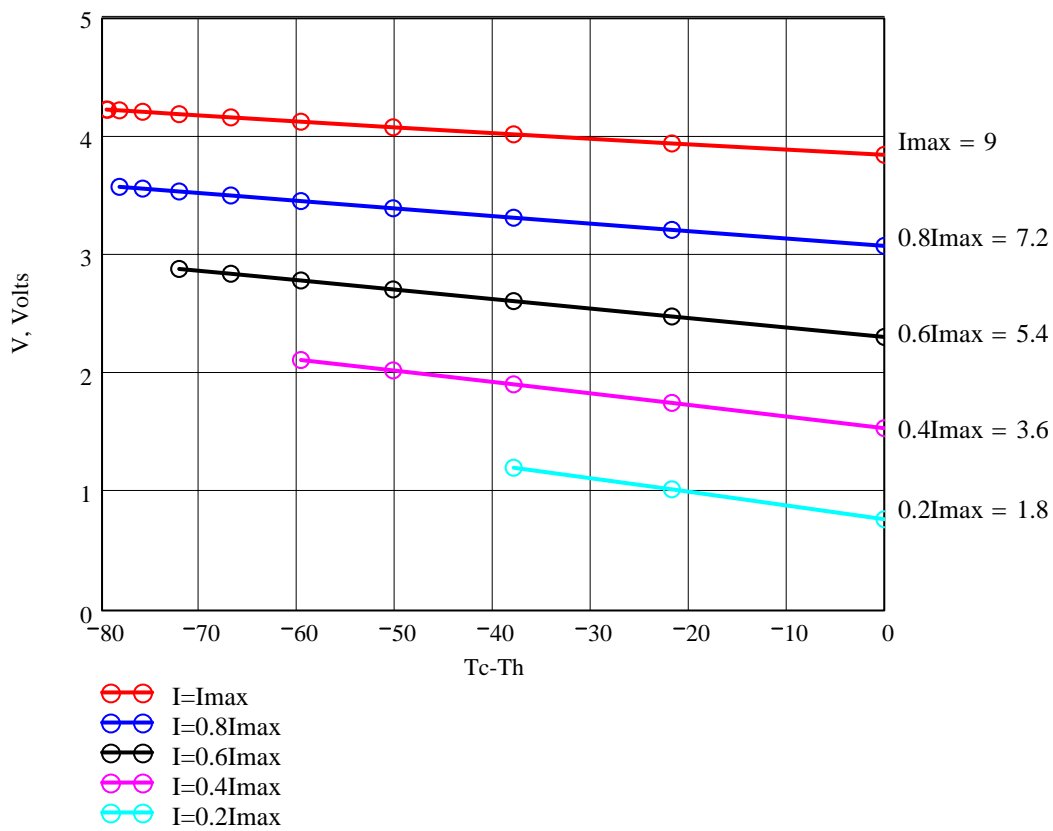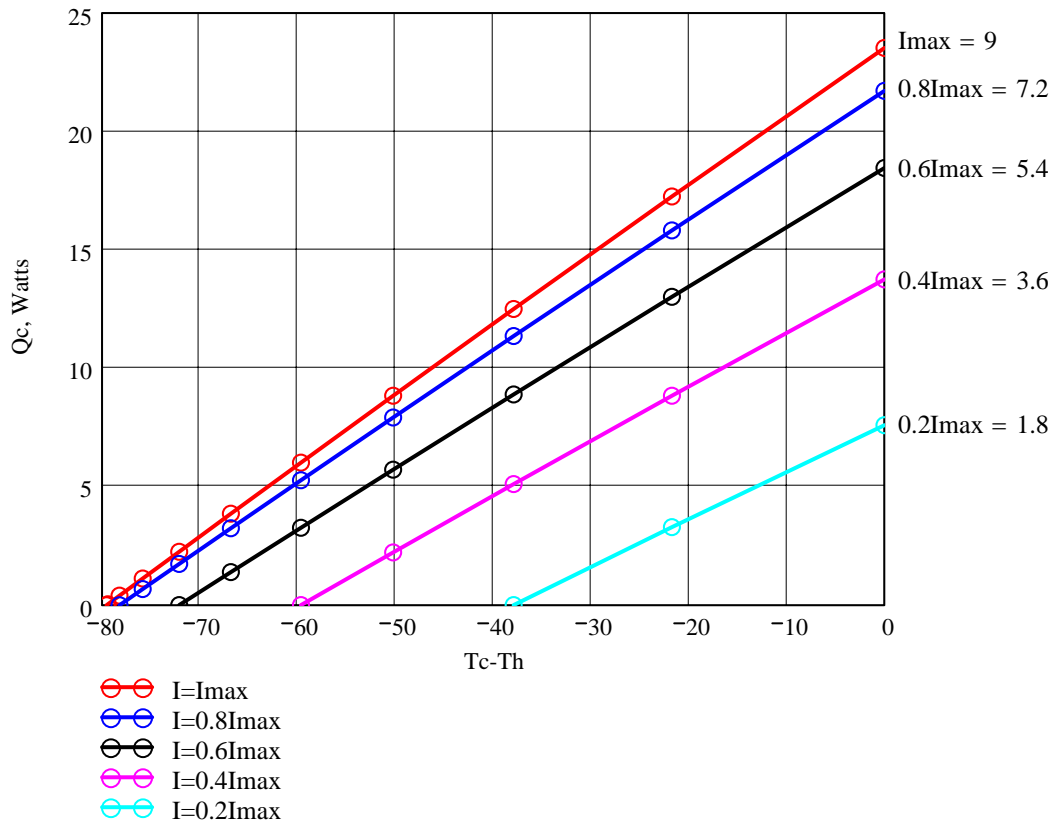

Q_c - refrigerating capacity at cold side of the module (Watts),
 $\Delta T = T_c - T_h$ - temperature difference between cold and hot sides of the module (°C),
 I - DC current through the modules (Amps)
 V - voltage applied to the module (Volts).