

Thermoelectric module TMG-111-1.4-1.2




Performance Data

V_{OC}, V	5.8	$T_{hot}=+175^{\circ}C, T_{cold}=+50^{\circ}C$
V_{load}, V	2.9	
R_{load}, Ohm	2.0	
W_{load}, W	4.2	
R_{in}, Ohm	2.0	
Module AC resistance, Ohm	1.0	$25 \pm 0.5^{\circ}C$

Tolerances for thermal and electrical parameters $\pm 10\%$

Dimensions in millimeters

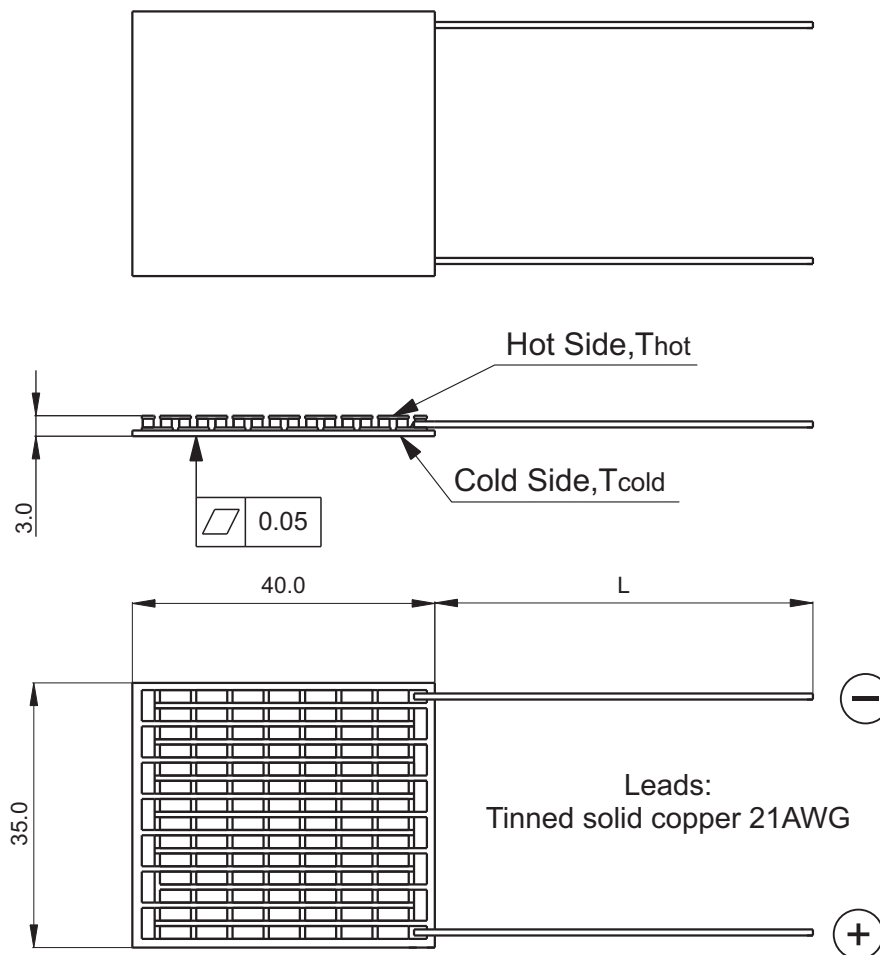


L -upon customer request

Additional

- RoHS 2002/95/EC compliant
- Cold Side and Hot Side Ceramics: Al_2O_3 , white 96%
- Assembling Solder : SnSb , M. P. $232^{\circ}C$; SnCu , M.P. $227^{\circ}C$

TMG-111 -1.4-1.2 power generating TE module

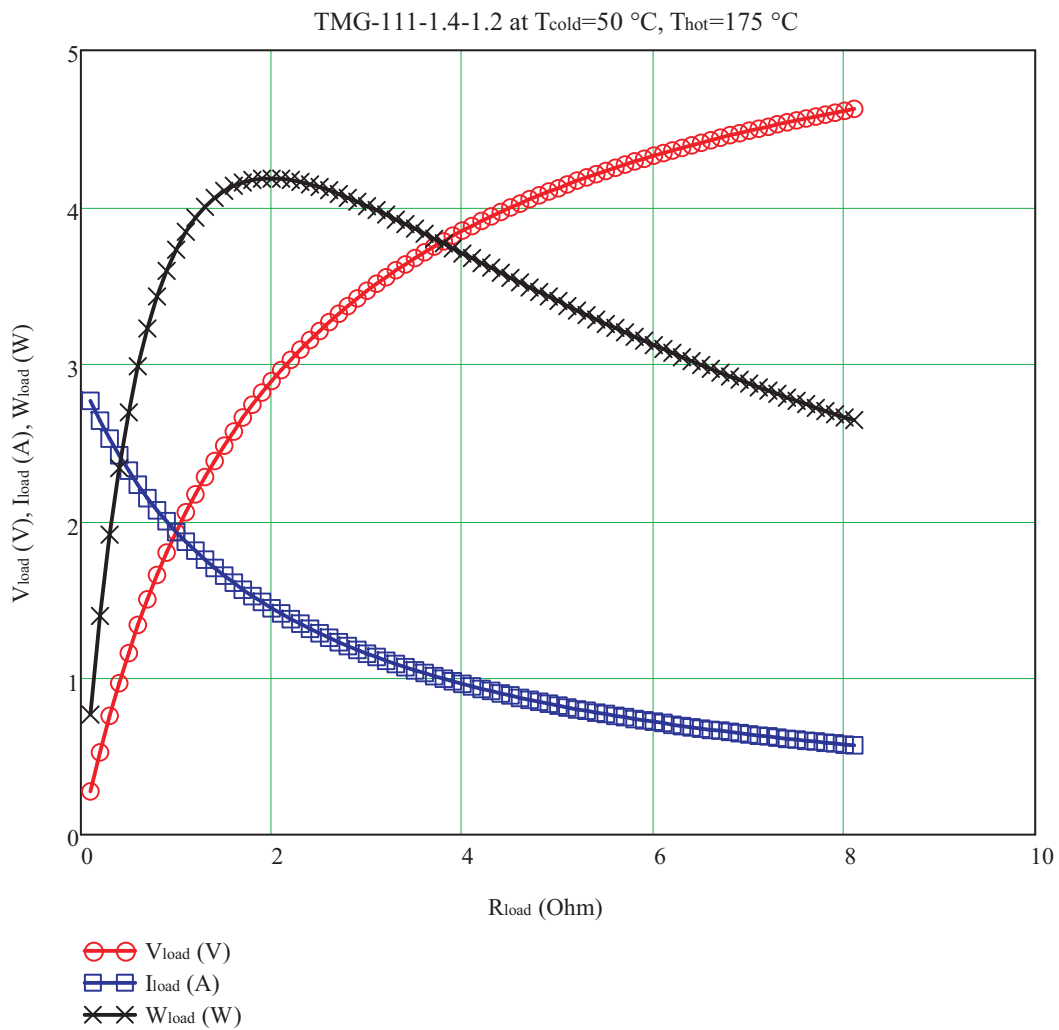

0.57 W/ $^{\circ}\text{C}$ is a thermal conductance of the module at $T_{\text{cold}}=50\text{ }^{\circ}\text{C}$ and $T_{\text{hot}}=175\text{ }^{\circ}\text{C}$
 $V_{\text{oc}} = 5.8\text{ V}$ is an open circuit voltage,
 R_{load} is a load resistance, Ohm,
 W_{load} is an output power corresponded to load resistance R_{load} , W,
 V_{load} is an output voltage, corresponded to R_{load} , V.